

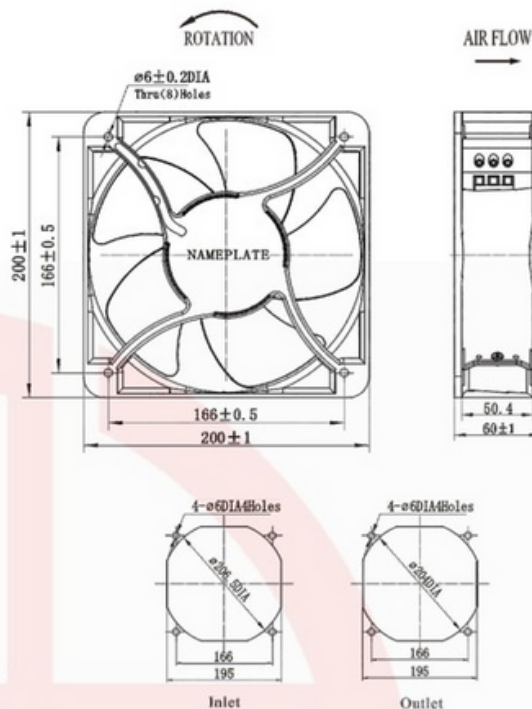


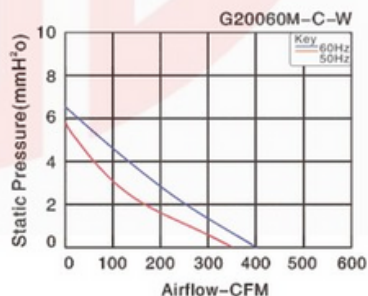

尺寸 Size: 200mm × 200mm × 60mm
 风量 Airflow: 350-530CFM
 噪音 Noise: 54-65dB(A)
 风叶 Impeller Material: PBT UL94-V0 Reinforced Plastic
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#24 UL 1332(Optional)
 马达 Motor: Capacitor-Run Induction Motor
 温度范围 Operating Temperature: -10°C~+65°C

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μ F/VAC
G20060HA _B -C-W	Ball	100/125	50/60	0.5/0.6	51/63	2600/2450	58/54	485/430	1	3.3/250
G20060HA _B -C-W	Ball	200/240	50/60	0.28/0.34	54/72	2600/2450	60/65	485/430	1	1.5/500
G20060HA _B -W	Ball	380/420	50/60	0.15/0.17	52/62	2600/2450	60/65	485/430	3	—
G20060HA _B -C-W	Ball	380/420	50/60	0.2	60	2600/2450	60/65	460/530	1	1/500
G20060MA _B -C-W	Ball	100/125	50/60	0.6	60	2100/2500	60/65	350/400	1	3.3/250
G20060MA _B -C-W	Ball	200/240	50/60	0.25	42	2100/2500	60/65	350/400	1	1/500

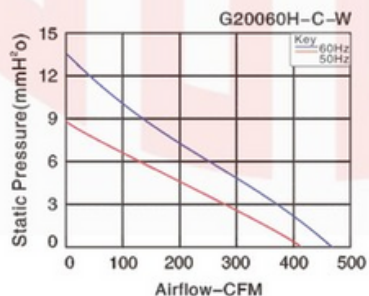

Fan Accessories

