


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON or TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4×18 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68				
The state of the s					

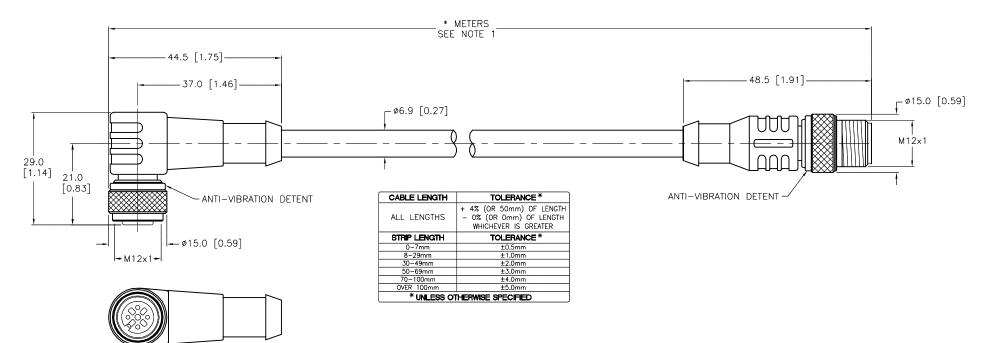

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S3060" DESIGNATES WELDLIFE CABLE WITH ITC/PLTC RATING AND CSA FT4 FLAME RATING.

D	UPDATE MALE COUPLING NUT	RDS	11/16/16	52506
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 www.turck.u	55441 7769 300 708 fax
MATERIAL		DRFT RDS	DATE 03/18/09	DESCRIPTION		
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=1.0	WKC 4.4T-*-RSC	, 4.41/53060	
		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
FINISH		NAUL INACTO		IDENTIFICATION NO.		
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]				D
		DO NOT SCALE	THIS DRAWING	FILE: 777024161	SHEET	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY