



SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON or TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER CABLE JACKET MATERIAL/COLOR	TPE/BLACK WITH YELLOW ARAMID OVERBRAID				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4x22 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS IEC IP67				

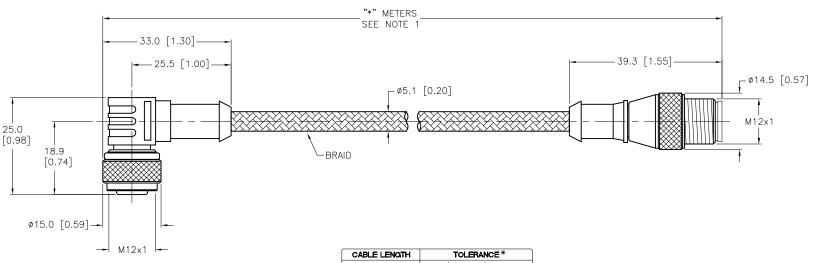



CABLE LENGTH	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
ALL LENGTHS				
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S3415" DESIGNATES WELDLIFE CORDSET, WITH BLACK OVERMOLD USING CABLE WITH ARAMID OVER-BRAID.
- 3. "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.
- 4. MAX. LENGTH FOR VENDING MACHINE: 6.0 METERS

4.	
MATERIAL	
SEE	SPECIFICATIONS
FINISH	
SEE	SPECIFICATIONS

2.

3.

RELATED DOCUMENTS 3RD ANGLE THIS DRAWING IS CONFIDENTIAL AND THE PROJECTION PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR UNIT OF MEASUREMENT REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DATE 08/01/18 DESCRIPTION

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

SHEET 1 OF 1

RDS SCALE 1=1.0 T.V.

DO NOT SCALE THIS DRAWING

WK 4.4T-*-RS 4.4T/S3415/SV

SOURCE DRAWING - FOR REFERENCE ONLY

MILLIMETER [INCH] FILE: 777041947

IDENTIFICATION NO. REV

Α	DRAWING RELEASE	RDS	08/02/18	
REV	DESCRIPTION	BY	DATE	ECO NO.